


Features

- Small size 2,5x2mm
- Temperature-compensated
- High accuracy



ATCQO2520



Specification

Type	ATCQO2520 CMOS	
Frequency Range	2,50MHz ~ 54,00MHz	
Frequency Tol. (25°C±3°C)	±0,5ppm, ±1,0ppm, ±1,5ppm ±2,0ppm	Frequency Stability
Power Supply (Vdd)	1,8V; 2,5V; 3,0V; 3,3V	vs. operating Temp. (ppm): ±0,5; ±1,0; ±1,5; ±2,0; ±2,5
Supply Current (Idd)	2,50MHz ~ 54,00MHz = 10mA max.	vs. Voltage Change (±5%) (ppm): ±0,3
Operating Temperature Range	0°C ~ +70°C ~ -40°C ~ +85°C	vs Load Change (±5%) (ppm): ±0,3
Output Load	15pF	vs Aging (first Year): (ppm): ±1,0
Output Symmetry	45~55% (VT-1/2Vdd)	
Rise/Fall Time	5ns max.	
Start Up Time	10ms max. <5ms typical	
Storage Temperature	-40°C - +85°C	
RoHS	compliant	
Contents Of Reel	3000 pcs	

Drawing (mm)



Test Circuit/Waveform

Please contact auris-sales for further information.

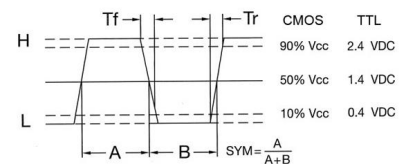

Tape dimension (mm)

Soldering profile

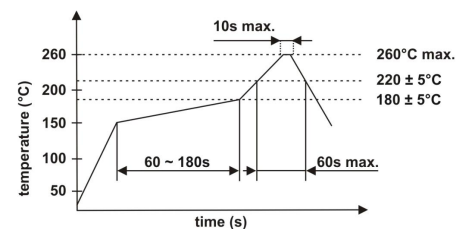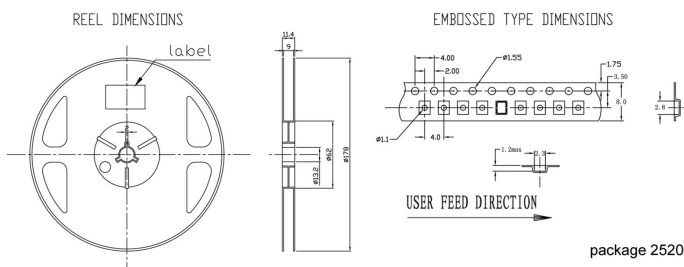

Order code

O	- 24.000000M	- ATCQO 2520	- 1,5	- 2,5	- 3,3	- E	- TR
Part	Frequency	Type/Package	Tolerance 25°C	Tolerance	Voltage	Temperature	Option
O=Oscillator	M=MHz	ATCQO=	±ppm	±ppm	3,3=3,3Volt	A= 0°C ~ +70°C	TR=Tape and reeled
		Temperature controlled QO			3,0=3,0Volt	B= -10°C ~ +60°C	X=Special options
		2520=2,5x2,0mm			2,8=2,8Volt	C= -10°C ~ +70°C	
					2,5=2,5Volt	D= -20°C ~ +70°C	
					2,0=2,0Volt	E= -40°C ~ +85°C	
					1,8=1,8Volt		

Please mention the output signal CMOS when ordering.